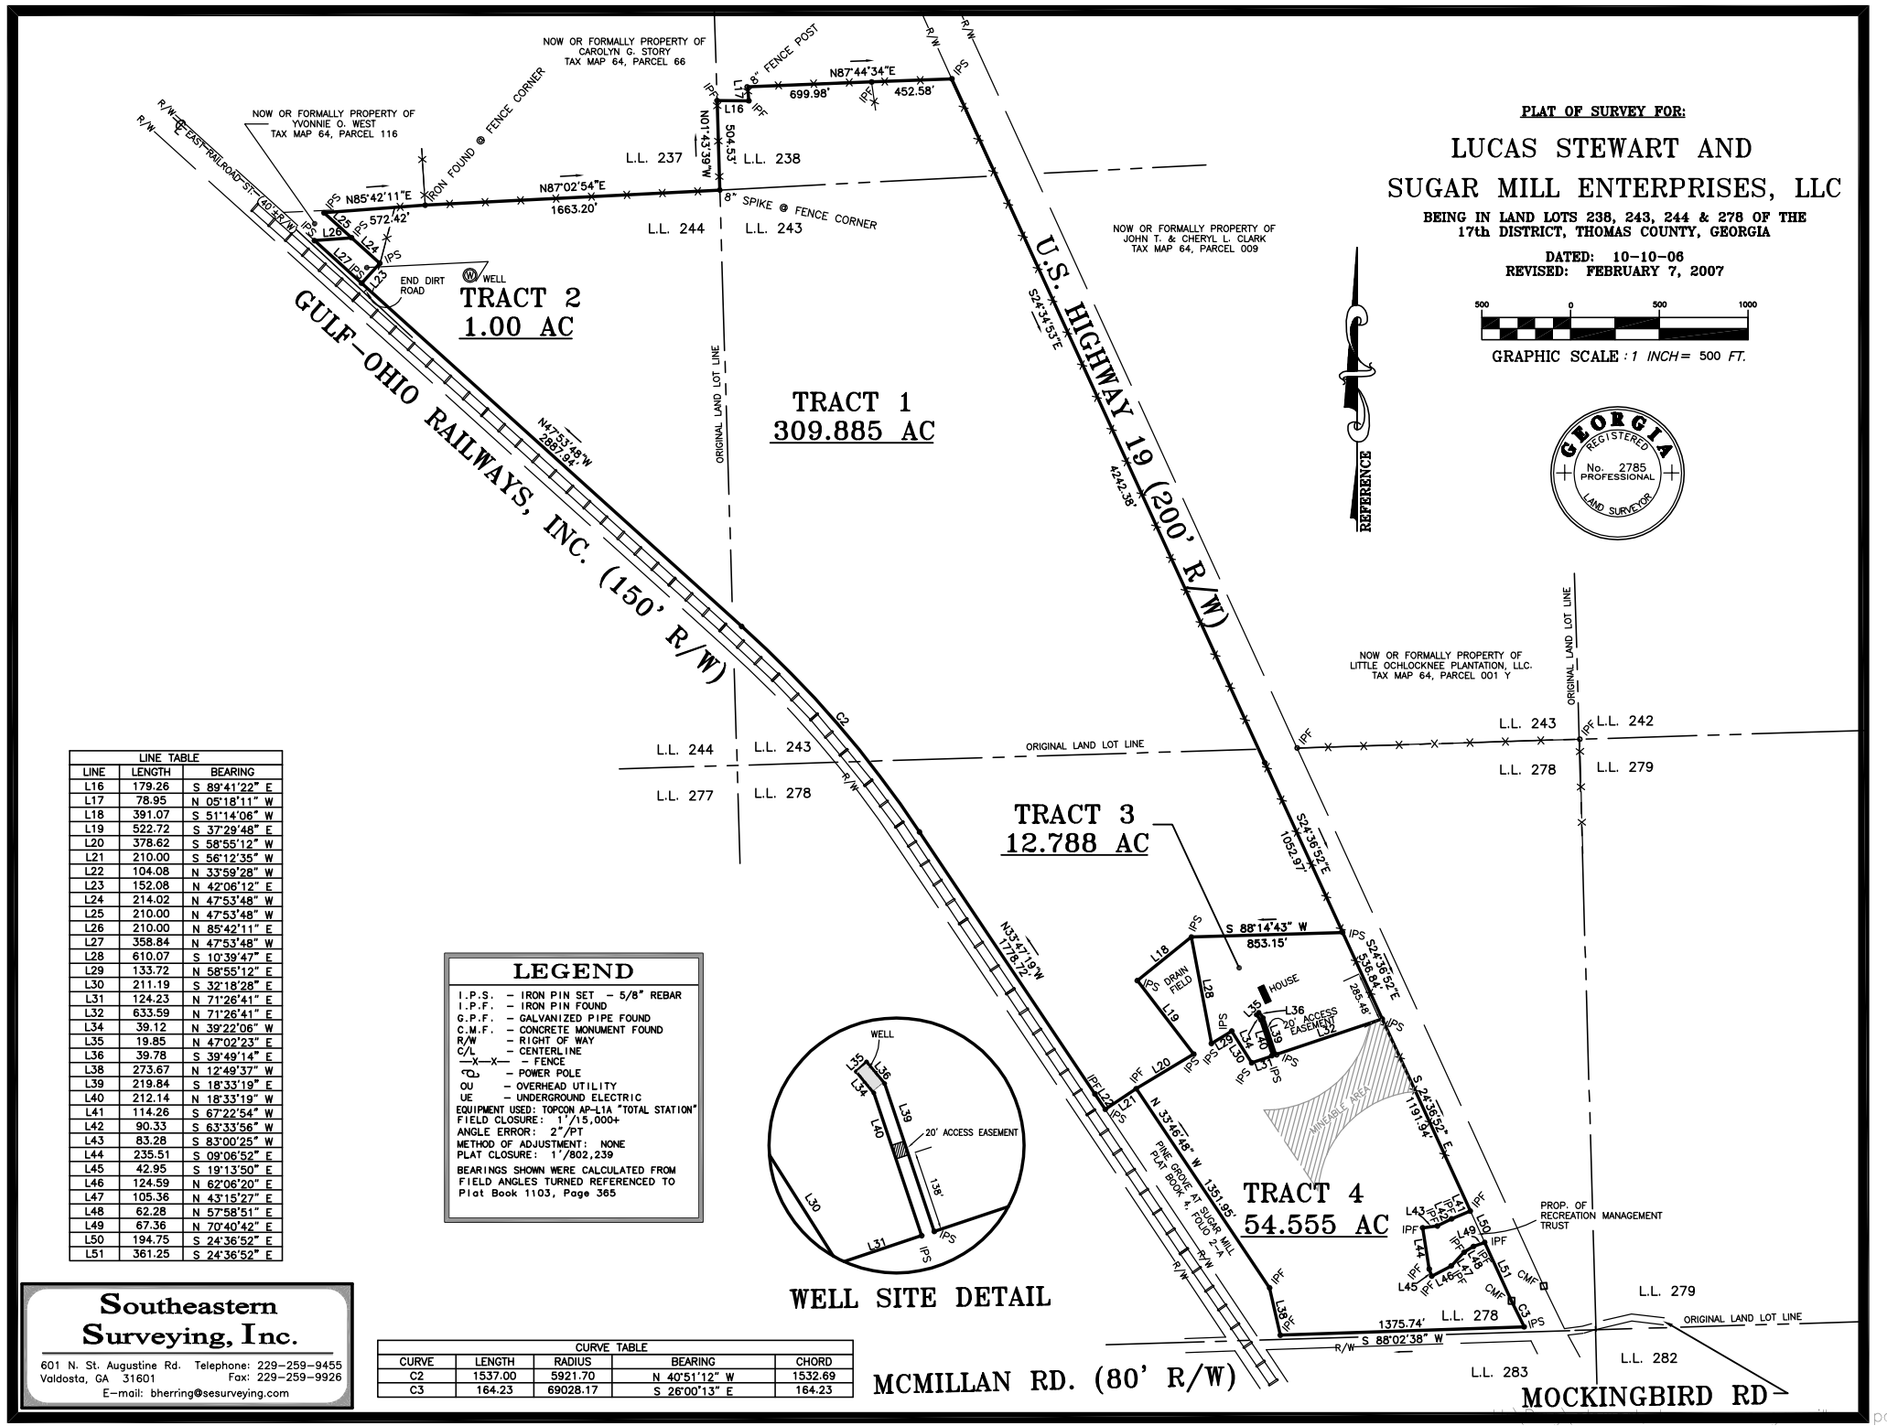

LINE TABLE		
LINE	LENGTH	BEARING
L16	179.26	S 89°41'22" E
L17	78.95	N 05°18'11" W
L18	391.07	S 51°14'06" W
L19	522.72	S 37°29'48" E
L20	378.62	S 58°55'12" W
L21	210.00	S 56°12'35" W
L22	104.08	N 33°59'28" W
L23	152.08	N 42°06'12" E
L24	214.02	N 47°53'48" W
L25	210.00	N 47°53'48" W
L26	210.00	N 85°42'11" E
L27	358.84	N 47°53'48" W
L28	610.07	S 10°39'47" E
L29	133.72	N 58°55'12" E
L30	211.19	S 32°18'28" E
L31	124.23	N 71°26'41" E
L32	633.59	N 71°26'41" E
L34	39.12	N 39°22'06" W
L35	19.85	N 47°02'23" E
L36	39.78	S 39°49'14" E
L38	273.67	N 12°49'37" W
L39	219.84	S 18°33'19" E
L40	212.14	N 18°33'19" W
L41	114.26	S 67°22'54" W
L42	90.33	S 63°33'56" W
L43	83.28	S 83°00'25" W
L44	235.51	S 09°06'52" E
L45	42.95	S 19°13'50" E
L46	124.59	N 62°06'20" E
L47	105.36	N 43°15'27" E
L48	62.28	N 57°58'51" E
L49	67.36	N 70°40'42" E
L50	194.75	S 24°36'52" E
L51	361.25	S 24°36'52" E

LEGEND

I.P.S. – IRON PIN SET – 5/8" REBAR
I.P.F. – IRON PIN FOUND
G.P.F. – GALVANIZED PIPE FOUND
C.M.F. – CONCRETE MONUMENT FOUND
R/W – RIGHT OF WAY
C/L – CENTERLINE
—X—X— – FENCE
– POWER POLE
OU – OVERHEAD UTILITY
UE – UNDERGROUND ELECTRIC

EQUIPMENT USED: TOPCON AP-L1A "TOTAL STATION"
FIELD CLOSURE: 1'/15,000+
ANGLE ERROR: 2"/PT
METHOD OF ADJUSTMENT: NONE
PLAT CLOSURE: 1'/802,239

BEARINGS SHOWN WERE CALCULATED FROM FIELD ANGLES TURNED REFERENCED TO Plat Book 1103, Page 365

WELL SITE DETAIL

CURVE TABLE				
CURVE	LENGTH	RADIUS	BEARING	CHORD
C2	1537.00	5921.70	N 40°51'12" W	1532.69
C3	164.23	69028.17	S 26°00'13" E	164.23

Southeastern Surveying, Inc.
601 N. St. Augustine Rd. Telephone: 229-259-9455
Valdosta, GA 31601 Fax: 229-259-9926
E-mail: bherring@sesurveying.com

park REVISED 2-6-07.dwg